
Quick Installation Guide



Setup the camera from a Smartphone/Tablet



Supported Smart phone system version

- iOS iPhone \ iPad
 Requires iOS 6.0 or later
- Android Smart phone \ Tablet
 Requires Android 4.0 or Later

Download the mCamView2 user manual here http://www.starvedia.com/download.html



wps button

Press the WPS Button

Press the WPS Button on the Camera. The LEDs will start flashing.



Scan the QR Code

Place your mobile about 10-30cm away from the camera.

The camera will beep when the QR code is successfully scanned. It will flash the LEDs and start the WiFi connection.



WiFi Connection is Established

When the WiFi connection is established, the blue LED will be flashing and the red LED will remain on.

The new icon for this camera will be created on the App.

STEP 1 Download the mCamView2 APP





MCamView2

Scan the QR code to download the software "mCamView2" from App Store for iPhone/iPad or from Android Market for Android devices.

STEP 2 Power on the Camera



Connect the Power Adapter to the Camera Do not connect the Ethernet cable.


STEP 4 Log in to the Camera

Tap the Camera icon to log in to the camera. The default administration account is "admin", the default administration password is empty (leave blank).

After logged in, tap the camera icon to play the live video.

* Notice: there are two passwords for the camera, one is the administration password, the other one is the video play password. The default video-play password is "ipcam" (lowercase).







STEP 3-1 WiFi Setup



Mobile Connected to 2.4G Hz WiFi

Make sure your iPhone/Android mobile is connected to a 2.4G Hz WiFi router, this is the must.



Smart WiFi Setup

Open the App mCamView2, tap the "+" icon to add the camera, choose "Smart WiFi setup" to setup the camera with WiFi connection.



Generate QR Code

Follow the steps and enter the WiFi password to generate a QR code.

STEP 5 SD Card Recording * Class 10 micro SD is prerequisite

- a Insert the SD card into the camera, the yellow LED on the camera will be blinking.
- b The SD card will start to do the recording once the alarm notification is triggered. The camera will do 5 second prerecording to prevent the loss of the important starting moment.
- c To enable the continuous SD card recording, please enable it inside the camera settings.
- d To playback the recorded video, tap the on the App and choose the "SD Card" and date/time to do the playback.








Quick Installation Guide



Setup the camera from a computer



Computer system version

- Windows
 Requires Windows XP or later
- MAC OS
 Requires Mac OS 10.7 or later

Download the CamView user manual here http://www.starvedia.com/download.html



FAQs

- What should I do if I have forgotten the password or the ID/Password card is missing?

 Ans Please press the Reset button for five seconds. The camera will reset to the factory default settings. The default video-play password is ipcam (lowercase).
- 2 What should I do if I cannot see the video remotely?
- Ans The red LED of the camera should be remain on when the camera is connected to the Internet. If the red LED is blinking, please double check the network connection and settings again.
- I can see the video from a remote location, but the video quality is not satisfying and sometimes the video disconnects and reconnects by itself.
- Ans It's probably due to the poor Internet bandwidth (internet speed), which might be not good enough.
 - You may try to apply for a better Internet connection from your Internet Service Provider or reduce the bandwidth setting of the camera.
- Q4 What is the default admin user name/password?
- Ans Default admin user name: admin

Default admin password: _____ (leave blank)

Q5 Where to download the latest camView software?

Ans Please refer to the following website to download the latest CamView software. www.starvedia.com/download.html

STEP 1 WiFi Setup

Please follow the Step 3-1 WiFi setup on the "Setup the camera from a smartphone/tablet" to set up the WiFi connection for the camera.



Mobile Connected to 2.4G Hz WiFi

Make sure your iPhone/Android mobile is connected to a 2.4G Hz WiFi router, this is the must.



Smart WiFi Setup

Open the App mCamView2, tap the "+" icon to add the camera, choose "Smart WiFi setup" to setup the camera with WiFi connection.



Generate QR Code

Follow the steps and enter the WiFi password to generate a QR code.

STEP 2 Install CamView Software

Please download the latest CamView software at this address: http://www.starvedia.com/download.html

After the setup menu pops up, select "Install Management Software" and follow the instructions.



Package Contents












a ID/


ID/Password Card

Power Adapter DC Cable Extender


nder and Screw

Product View

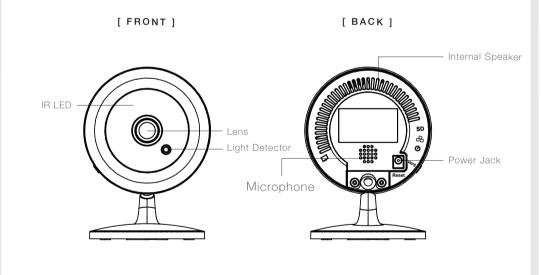



[SIDE]



[SIDE]

[BOTTOM]

[TOP]

Bracket Screw Hole